


Single Conductor 1000V

XLPE/PVC/AIA/PVC

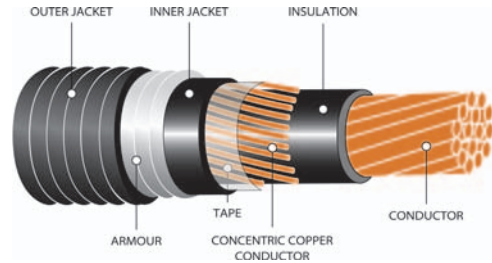

SPECIFICATIONS

- CSA FT4
- CSA C22.2 No. 131
- IEEE 383 (70,000 BTU/hr) Flame Test
- ICEA T-30-520 (70,000 BTU/hr) Vertical Flame Test



CONSTRUCTION


- Conductor:** Bare copper Class B compact or compressed stranded
- Insulation:** Cross-Linked Polyethylene (XLPE) Type RW90
- Ground (Bonding) Conductor:** Concentric serving of solid bare copper wires applied over the insulation
- Inner Jacket:** Flame-retardant, moisture and sunlight resistant Polyvinyl Chloride (PVC)
- Armour:** Aluminum Interlocked Armour (AIA)
- Outer Jacket:** Low-temperature, moisture and sunlight resistant Polyvinyl Chloride (PVC), black
- Options:** Other coloured outer jacket and constructions available upon request

| Part Number | AWG Size | | Thickness of | | Approximate Diameter (Over) | | | | Copper Content | | Net Weight Aluminum Armour | | Amp. (30°C Ambient) | Inductive Reactance OHM/KM | Recommended Connector* | |
|--------------|----------|--------------------|--------------|--------------------|-----------------------------|--------------------|--------------|--------------------|----------------|--------|----------------------------|--------|---------------------|----------------------------|------------------------|---------|
| | Cond. | Bond (Ground) Wire | Insul. (in.) | Inner Jacket (in.) | Insul. (in.) | Inner Jacket (in.) | Armour (in.) | Outer Jacket (in.) | LB/ MFT | KG/ KM | LB/ MFT | KG/ KM | | | O-Z JMC | O-Z MCA |
| 05018-09-010 | 6 | 8 | 0.060 | 0.030 | 0.300 | 0.470 | 0.650 | 0.750 | 141.2 | 210.0 | 330 | 490 | 100 | 0.26 | 2 | 2 |
| 05018-13-010 | 4 | 6 | 0.060 | 0.030 | 0.340 | 0.520 | 0.700 | 0.800 | 221.8 | 330.0 | 426 | 633 | 135 | 0.25 | 2 | 3 |
| 05018-17-010 | 3 | 6 | 0.060 | 0.030 | 0.370 | 0.540 | 0.720 | 0.820 | 256.8 | 382.0 | 469 | 697 | 155 | 0.24 | 2 | 3 |
| 05018-21-010 | 2 | 6 | 0.060 | 0.030 | 0.400 | 0.570 | 0.750 | 0.850 | 299.8 | 446.0 | 522 | 776 | 180 | 0.23 | 2 | 3 |
| 05018-25-010 | 1 | 4 | 0.080 | 0.045 | 0.470 | 0.680 | 0.880 | 0.980 | 403.0 | 599.5 | 695 | 1034 | 210 | 0.24 | 3 | 3 |
| 05019-01-010 | 1/0 | 4 | 0.080 | 0.045 | 0.510 | 0.710 | 0.910 | 1.010 | 471.2 | 701.0 | 780 | 1160 | 245 | 0.23 | 3 | 3 |
| 05019-05-010 | 2/0 | 4 | 0.080 | 0.045 | 0.550 | 0.760 | 0.980 | 1.070 | 557.9 | 830.0 | 927 | 1379 | 285 | 0.23 | 3 | 4 |
| 05019-09-010 | 3/0 | 3 | 0.080 | 0.045 | 0.600 | 0.830 | 1.050 | 1.150 | 706.4 | 1051.0 | 1106 | 1645 | 330 | 0.22 | 3 | 4 |
| 05019-13-010 | 4/0 | 3 | 0.080 | 0.045 | 0.650 | 0.880 | 1.100 | 1.200 | 845.2 | 1257.5 | 1267 | 1884 | 385 | 0.21 | 3 | 4 |
| 05020-01-010 | 250 | 2 | 0.090 | 0.060 | 0.720 | 0.970 | 1.190 | 1.290 | 1008.2 | 1500.0 | 1501 | 2233 | 425 | 0.21 | 4 | 5 |
| 05020-05-010 | 300 | 2 | 0.090 | 0.060 | 0.770 | 1.020 | 1.240 | 1.340 | 1164.8 | 1733.0 | 1683 | 2503 | 480 | 0.21 | 4 | 5 |
| 05020-09-010 | 350 | 1 | 0.090 | 0.060 | 0.810 | 1.090 | 1.310 | 1.420 | 1386.2 | 2062.5 | 1934 | 2877 | 530 | 0.21 | 5 | 5 |
| 05020-13-010 | 400 | 1 | 0.090 | 0.060 | 0.850 | 1.127 | 1.347 | 1.450 | 1545.2 | 2299.0 | 2071 | 3081 | 575 | 0.21 | 5 | 5 |
| 05020-21-010 | 500 | 1/0 | 0.090 | 0.060 | 0.930 | 1.220 | 1.440 | 1.540 | 1925.2 | 2864.5 | 2541 | 3780 | 660 | 0.20 | 5 | 6 |
| 05020-25-010 | 600 | 1/0 | 0.090 | 0.060 | 1.050 | 1.304 | 1.524 | 1.634 | 2239.5 | 3332.0 | 2844 | 4231 | 740 | 0.20 | 6 | 6 |
| 05020-41-010 | 750 | 2/0 | 0.090 | 0.060 | 1.160 | 1.480 | 1.730 | 1.840 | 2815.4 | 4189.0 | 3636 | 5410 | 845 | 0.19 | 6 | 7 |
| 05021-01-010 | 1000 | 2/0 | 0.090 | 0.060 | 1.310 | 1.630 | 1.880 | 1.990 | 3601.8 | 5359.0 | 4497 | 6691 | 1000 | 0.19 | 8 | 8 |

NOTE: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

* See page 31 for corresponding connector.

Two Conductor 1000V XLPE/PVC/AIA/PVC

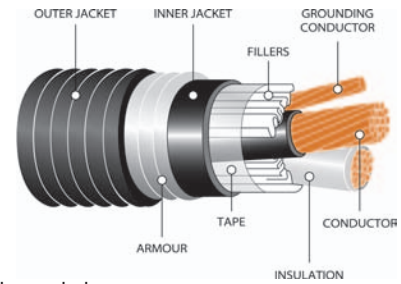

SPECIFICATIONS

- CSA FT4
- CSA C22.2 No. 131
- IEEE 383 (70,000 BTU/hr) Flame Test
- ICEA T-30-520 (70,000 BTU/hr) Vertical Flame Test



CONSTRUCTION

- Conductor:** Bare copper Class B compact or compressed stranded
- Insulation:** Cross-Linked Polyethylene (XLPE) Type RW90
- Ground (Bonding) Conductor:** Uninsulated stranded bare copper conductor
- Inner Jacket:** Flame-retardant, moisture and sunlight resistant Polyvinyl Chloride (PVC)
- Armour:** Aluminum Interlocked Armour (AIA)
- Outer Jacket:** Low-temperature, moisture and sunlight resistant Polyvinyl Chloride (PVC), black
- Options:** Galvanized Steel Interlocked Armour (GSIA)
Other coloured outer jacket and constructions available upon request


| Part Number | AWG Size | | Thickness of | | Approximate Diameter (Over) | | | | Copper Content | | Net Weight Aluminum Armour | | Amp. (30°C Ambient) | Inductive Reactance OHM/KM | Recommended Connector* | |
|--------------|----------|--------------------|--------------|--------------------|-----------------------------|--------------------|--------------|--------------------|----------------|--------|----------------------------|--------|---------------------|----------------------------|------------------------|---------|
| | Cond. | Bond (Ground) Wire | Insul. (in.) | Inner Jacket (in.) | Insul. (in.) | Inner Jacket (in.) | Armour (in.) | Outer Jacket (in.) | LB/ MFT | KG/ KM | LB/ MFT | KG/ KM | | | O-Z JMC | O-Z MCA |
| 05015-01-010 | 14 | 14 | 0.045 | 0.045 | 0.170 | 0.440 | 0.620 | 0.720 | 38.7 | 57.5 | 224 | 332 | 15 | 0.14 | 1 | 2 |
| 05016-01-010 | 12 | 14 | 0.045 | 0.045 | 0.190 | 0.480 | 0.680 | 0.740 | 54.1 | 80.5 | 253 | 378 | 20 | 0.13 | 2 | 2 |
| 05017-01-010 | 10 | 12 | 0.045 | 0.045 | 0.210 | 0.560 | 0.760 | 0.790 | 86.1 | 128.0 | 285 | 425 | 30 | 0.12 | 2 | 3 |
| 05018-02-010 | 8 | 10 | 0.045 | 0.060 | 0.230 | 0.590 | 0.780 | 0.860 | 136.8 | 203.5 | 407 | 607 | 45 | 0.12 | 2 | 3 |
| 05018-10-010 | 6 | 8 | 0.060 | 0.060 | 0.300 | 0.730 | 0.990 | 1.100 | 217.5 | 323.5 | 567 | 846 | 65 | 0.12 | 3 | 4 |
| 05018-14-010 | 4 | 8 | 0.060 | 0.060 | 0.340 | 0.820 | 1.040 | 1.140 | 315.3 | 469.0 | 765 | 1137 | 85 | 0.11 | 3 | 4 |
| 05018-18-010 | 3 | 6 | 0.060 | 0.080 | 0.360 | 0.904 | 1.124 | 1.230 | 415.4 | 618.0 | 906 | 1348 | 105 | 0.11 | 4 | 4 |
| 05018-22-010 | 2 | 6 | 0.060 | 0.080 | 0.400 | 0.970 | 1.190 | 1.290 | 502.1 | 747.0 | 1056 | 1570 | 120 | 0.11 | 4 | 5 |
| 05018-26-010 | 1 | 6 | 0.080 | 0.080 | 0.470 | 1.120 | 1.340 | 1.450 | 611.7 | 910.1 | 1290 | 1919 | 140 | 0.11 | 5 | 5 |
| 05019-02-010 | 1/0 | 6 | 0.080 | 0.080 | 0.510 | 1.210 | 1.430 | 1.540 | 749.1 | 1114.5 | 1484 | 2208 | 155 | 0.11 | 5 | 6 |
| 05019-06-010 | 2/0 | 6 | 0.080 | 0.080 | 0.550 | 1.290 | 1.540 | 1.650 | 922.1 | 1372.0 | 1790 | 2662 | 185 | 0.10 | 6 | 6 |
| 05019-10-010 | 3/0 | 4 | 0.080 | 0.080 | 0.600 | 1.390 | 1.640 | 1.750 | 1190.0 | 1770.5 | 2127 | 3164 | 210 | 0.10 | 6 | 7 |
| 05019-14-010 | 4/0 | 4 | 0.080 | 0.080 | 0.650 | 1.490 | 1.740 | 1.850 | 1466.2 | 2181.5 | 2480 | 3690 | 235 | 0.10 | 6 | 7 |
| 05020-02-010 | 250 | 4 | 0.090 | 0.080 | 0.720 | 1.620 | 1.870 | 1.980 | 1708.8 | 2542.5 | 2839 | 4223 | 265 | 0.10 | 7 | 8 |
| 05020-06-010 | 300 | 4 | 0.090 | 0.110 | 0.770 | 1.790 | 2.040 | 2.150 | 2021.7 | 3008.0 | 3360 | 4999 | 295 | 0.10 | 8 | 8 |
| 05020-10-010 | 350 | 3 | 0.090 | 0.110 | 0.810 | 1.861 | 2.111 | 2.239 | 2382.9 | 3545.5 | 3735 | 5556 | 325 | 0.10 | 9 | 9 |
| 05020-14-010 | 400 | 3 | 0.090 | 0.110 | 0.850 | 1.949 | 2.199 | 2.326 | 2691.1 | 4004.0 | 4131 | 6146 | 345 | 0.10 | 9 | 9 |
| 05020-22-010 | 500 | 3 | 0.090 | 0.110 | 0.930 | 2.120 | 2.370 | 2.500 | 3316.5 | 4934.5 | 5031 | 7485 | 395 | 0.09 | 10 | 10 |
| 05020-42-010 | 750 | 1 | 0.090 | 0.110 | 1.160 | 2.580 | 2.830 | 2.960 | 4941.9 | 7353.0 | 7053 | 10494 | 500 | 0.09 | 12 | 11 |
| 05020-46-010 | 1000 | 1 | 0.090 | 0.110 | 1.310 | 2.885 | 3.135 | 3.305 | 6563.7 | 9766.0 | 9118 | 13566 | 585 | 0.09 | 13 | 12 |

NOTE: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

* See page 31 for corresponding connector.

Three Conductor 1000V

XLPE/PVC/AIA/PVC

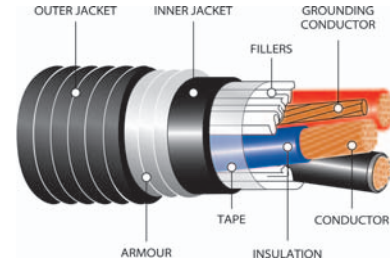

SPECIFICATIONS

- CSA FT4
- CSA C22.2 No. 131
- IEEE 383 (70,000 BTU/hr) Flame Test
- ICEA T-30-520 (70,000 BTU/hr) Vertical Flame Test



CONSTRUCTION

- Conductor:** Bare copper Class B compact or compressed stranded
- Insulation:** Cross-Linked Polyethylene (XLPE) Type RW90
- Ground (Bonding) Conductor:** Uninsulated stranded bare copper conductor
- Inner Jacket:** Flame-retardant, moisture and sunlight resistant Polyvinyl Chloride (PVC)
- Armour:** Aluminum Interlocked Armour (AIA)
- Outer Jacket:** Low-temperature, moisture and sunlight resistant Polyvinyl Chloride (PVC), black
- Options:** Galvanized Steel Interlocked Armour (GSIA)
Other coloured outer jacket and constructions available upon request


| Part Number | AWG Size | | Thickness of | | Approximate Diameter (Over) | | | | Copper Content | | Net Weight Aluminum Armour | | Amp. (30°C Ambient) | Inductive Reactance OHM/KM | Recommended Connector* | |
|--------------|----------|--------------------|--------------|--------------------|-----------------------------|--------------------|--------------|--------------------|----------------|---------|----------------------------|--------|---------------------|----------------------------|------------------------|---------|
| | Cond. | Bond (Ground) Wire | Insul. (in.) | Inner Jacket (in.) | Insul. (in.) | Inner Jacket (in.) | Armour (in.) | Outer Jacket (in.) | LB/ MFT | KG/ KM | LB/ MFT | KG/ KM | | | O-Z JMC | O-Z MCA |
| 05015-02-010 | 14 | 14 | 0.045 | 0.045 | 0.170 | 0.470 | 0.670 | 0.730 | 51.8 | 77.0 | 251 | 375 | 15 | 0.14 | 1 | 2 |
| 05016-02-010 | 12 | 14 | 0.045 | 0.045 | 0.190 | 0.510 | 0.710 | 0.760 | 74.6 | 111.0 | 291 | 434 | 20 | 0.13 | 2 | 3 |
| 05017-02-010 | 10 | 12 | 0.045 | 0.060 | 0.210 | 0.590 | 0.790 | 0.850 | 118.3 | 176.0 | 389 | 581 | 30 | 0.12 | 2 | 3 |
| 05018-03-010 | 8 | 10 | 0.045 | 0.060 | 0.230 | 0.630 | 0.830 | 0.900 | 188.9 | 281.0 | 471 | 703 | 45 | 0.12 | 2 | 3 |
| 05018-11-010 | 6 | 8 | 0.060 | 0.060 | 0.300 | 0.780 | 1.040 | 1.150 | 299.8 | 446.0 | 714 | 1066 | 65 | 0.12 | 3 | 4 |
| 05018-15-010 | 4 | 8 | 0.060 | 0.080 | 0.340 | 0.910 | 1.170 | 1.230 | 447.0 | 665.0 | 961 | 1434 | 85 | 0.11 | 4 | 4 |
| 05018-19-010 | 3 | 6 | 0.060 | 0.080 | 0.370 | 0.970 | 1.230 | 1.300 | 582.1 | 866.0 | 1126 | 1681 | 105 | 0.11 | 4 | 5 |
| 05018-23-010 | 2 | 6 | 0.060 | 0.080 | 0.400 | 1.020 | 1.280 | 1.370 | 710.8 | 1057.5 | 1291 | 1927 | 120 | 0.11 | 4 | 5 |
| 05018-27-010 | 1 | 6 | 0.080 | 0.080 | 0.470 | 1.210 | 1.430 | 1.540 | 876.8 | 1304.5 | 1597 | 2376 | 140 | 0.11 | 5 | 6 |
| 05019-03-010 | 1/0 | 6 | 0.080 | 0.080 | 0.510 | 1.290 | 1.540 | 1.650 | 1081.8 | 1609.5 | 1938 | 2883 | 155 | 0.11 | 6 | 6 |
| 05019-07-010 | 2/0 | 6 | 0.080 | 0.080 | 0.550 | 1.380 | 1.630 | 1.740 | 1342.2 | 1997.0 | 2263 | 3367 | 185 | 0.10 | 6 | 7 |
| 05019-11-010 | 3/0 | 4 | 0.080 | 0.080 | 0.600 | 1.490 | 1.740 | 1.840 | 1719.3 | 2558.0 | 2702 | 4019 | 210 | 0.10 | 6 | 7 |
| 05019-15-010 | 4/0 | 4 | 0.080 | 0.080 | 0.650 | 1.600 | 1.850 | 1.960 | 2132.9 | 3173.5 | 3198 | 4758 | 235 | 0.10 | 7 | 7 |
| 05020-03-010 | 250 | 4 | 0.090 | 0.110 | 0.720 | 1.800 | 2.050 | 2.160 | 2498.2 | 3717.0 | 3819 | 5681 | 265 | 0.10 | 8 | 8 |
| 05020-07-010 | 300 | 4 | 0.090 | 0.110 | 0.770 | 1.910 | 2.160 | 2.270 | 2966.7 | 4414.0 | 4386 | 6525 | 295 | 0.10 | 9 | 9 |
| 05020-11-010 | 350 | 3 | 0.090 | 0.110 | 0.810 | 2.010 | 2.260 | 2.370 | 3475.4 | 5171.0 | 4963 | 7383 | 325 | 0.10 | 10 | 9 |
| 05020-15-010 | 400 | 3 | 0.090 | 0.110 | 0.850 | 2.072 | 2.322 | 2.474 | 3954.0 | 5883.0 | 5533 | 8232 | 345 | 0.10 | 10 | 10 |
| 05020-23-010 | 500 | 3 | 0.090 | 0.110 | 0.930 | 2.270 | 2.520 | 2.650 | 4891.9 | 7278.5 | 6683 | 9943 | 395 | 0.09 | 10 | 10 |
| 05020-28-010 | 600 | 2 | 0.090 | 0.110 | 1.050 | 2.459 | 2.709 | 2.861 | 5878.8 | 8747.0 | 7770 | 11560 | 455 | 0.09 | 12 | 11 |
| 05020-43-010 | 750 | 2 | 0.090 | 0.140 | 1.160 | 2.760 | 3.010 | 3.150 | 7307.4 | 10872.5 | 9494 | 14126 | 500 | 0.09 | 12 | 12 |
| 05021-03-010 | 1000 | 1 | 0.090 | 0.140 | 1.310 | 3.080 | 3.330 | 3.500 | 9715.8 | 14456.0 | 12295 | 18293 | 585 | 0.09 | 13 | 12 |

NOTE: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

* See page 31 for corresponding connector.

Four Conductor 1000V

XLPE/PVC/AIA/PVC

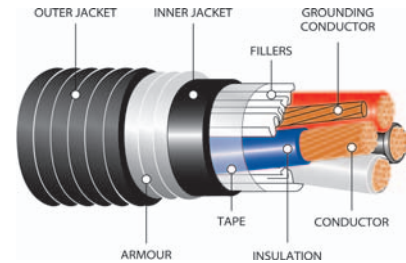

SPECIFICATIONS

- CSA FT4
- CSA C22.2 No. 131
- IEEE 383 (70,000 BTU/hr) Flame Test
- ICEA T-30-520 (70,000 BTU/hr) Vertical Flame Test



CONSTRUCTION

- Conductor:** Bare copper Class B compact or compressed stranded
- Insulation:** Cross-Linked Polyethylene (XLPE) Type RW90
- Ground (Bonding) Conductor:** Uninsulated stranded bare copper conductor
- Inner Jacket:** Flame-retardant, moisture and sunlight resistant Polyvinyl Chloride (PVC)
- Armour:** Aluminum Interlocked Armour (AIA)
- Outer Jacket:** Low-temperature, moisture and sunlight resistant Polyvinyl Chloride (PVC), black
- Options:** Galvanized Steel Interlocked Armour (GSIA)
Other coloured outer jacket and constructions available upon request

| Part Number | AWG Size | | Thickness of | | Approximate Diameter (Over) | | | | Copper Content | | Net Weight Aluminum Armour | | Amp. (30°C Ambient) | Inductive Reactance OHM/KM | Recommended Connector* | |
|--------------|----------|--------------------|--------------|--------------------|-----------------------------|--------------------|--------------|--------------------|----------------|---------|----------------------------|--------|---------------------|----------------------------|------------------------|---------|
| | Cond. | Bond (Ground) Wire | Insul. (in.) | Inner Jacket (in.) | Insul. (in.) | Inner Jacket (in.) | Armour (in.) | Outer Jacket (in.) | LB/ MFT | KG/ KM | LB/ MFT | KG/ KM | | | O-Z JMC | O-Z MCA |
| 05015-03-010 | 14 | 14 | 0.045 | 0.045 | 0.170 | 0.510 | 0.710 | 0.810 | 64.6 | 96.0 | 301 | 449 | 12 | 0.14 | 2 | 3 |
| 05016-03-010 | 12 | 14 | 0.045 | 0.060 | 0.190 | 0.590 | 0.790 | 0.850 | 94.8 | 141.0 | 368 | 549 | 16 | 0.13 | 2 | 3 |
| 05017-03-010 | 10 | 12 | 0.045 | 0.060 | 0.210 | 0.650 | 0.850 | 0.900 | 151.6 | 225.5 | 460 | 687 | 24 | 0.12 | 2 | 3 |
| 05018-04-010 | 8 | 10 | 0.045 | 0.060 | 0.230 | 0.690 | 0.890 | 0.970 | 241.0 | 358.5 | 606 | 905 | 36 | 0.12 | 3 | 3 |
| 05018-12-010 | 6 | 8 | 0.060 | 0.060 | 0.300 | 0.890 | 1.150 | 1.240 | 382.8 | 569.5 | 927 | 1384 | 52 | 0.12 | 4 | 4 |
| 05018-16-010 | 4 | 8 | 0.060 | 0.080 | 0.340 | 0.990 | 1.250 | 1.330 | 579.1 | 861.5 | 1202 | 1794 | 68 | 0.11 | 4 | 5 |
| 05018-20-010 | 3 | 6 | 0.060 | 0.080 | 0.370 | 1.080 | 1.30 | 1.410 | 749.1 | 1114.5 | 1388 | 2064 | 84 | 0.11 | 5 | 5 |
| 05018-24-010 | 2 | 6 | 0.060 | 0.080 | 0.400 | 1.120 | 1.380 | 1.480 | 920.5 | 1369.5 | 1691 | 2524 | 96 | 0.11 | 5 | 5 |
| 05018-28-010 | 1 | 6 | 0.080 | 0.080 | 0.470 | 1.330 | 1.580 | 1.690 | 1140.9 | 1697.5 | 2056 | 3059 | 112 | 0.11 | 6 | 6 |
| 05019-04-010 | 1/0 | 6 | 0.080 | 0.080 | 0.510 | 1.420 | 1.670 | 1.780 | 1415.1 | 2105.5 | 2402 | 3573 | 124 | 0.11 | 6 | 7 |
| 05019-08-010 | 2/0 | 6 | 0.080 | 0.080 | 0.550 | 1.520 | 1.770 | 1.880 | 1761.9 | 2621.5 | 2818 | 4192 | 148 | 0.10 | 7 | 7 |
| 05019-12-010 | 3/0 | 4 | 0.080 | 0.080 | 0.600 | 1.640 | 1.890 | 2.000 | 2248.2 | 3345.0 | 3404 | 5064 | 168 | 0.10 | 8 | 8 |
| 05019-16-010 | 4/0 | 4 | 0.080 | 0.110 | 0.650 | 1.830 | 2.080 | 2.190 | 2800.0 | 4166.0 | 4176 | 6212 | 188 | 0.10 | 9 | 8 |
| 05020-04-010 | 250 | 4 | 0.090 | 0.110 | 0.720 | 1.990 | 2.240 | 2.350 | 3286.2 | 4889.5 | 4809 | 7154 | 212 | 0.10 | 9 | 9 |
| 05020-12-010 | 350 | 3 | 0.090 | 0.110 | 0.810 | 2.220 | 2.470 | 2.600 | 4579.3 | 6813.5 | 6362 | 9465 | 260 | 0.10 | 10 | 10 |
| 05020-24-010 | 500 | 3 | 0.090 | 0.110 | 0.930 | 2.510 | 2.760 | 2.890 | 6467.3 | 9622.5 | 8556 | 12729 | 316 | 0.09 | 12 | 11 |
| 05020-44-010 | 750 | 2 | 0.090 | 0.140 | 1.160 | 3.140 | 3.390 | 3.550 | 9674.1 | 14394.0 | 12601 | 18748 | 400 | 0.09 | 13 | 12 |

NOTE: All dimensions are nominal and are subject to normal manufacturing tolerance. Specifications are subject to change without prior notice.

* See page 31 for corresponding connector.